
4 GKT CHAPTER 05 - COUPLINGS

GKT 06 // Telescopic coupling



- \to Telescopic coupling for transmission of drive torques on very big VariVent $^{\!@}$ winding systems.
- For use with variable axial offset between output shaft of power drive/ manual drive and winding shaft.
- Smooth and quiet length adjustment with high-performance rollers, 60 x 60 mm rectangular aluminium tube with 2 steel universal joints, plastic spacer cylinder to assure correct distance away from building.
- → Version '47' with internal adapter for 50 x 1.5 mm aluminium winding tube.
- \rightarrow All parts stainless, i.e. non-rusting.
- ightarrow For detailed information about the VariVent® winding systems, please refer to Chapter 2 'Systems'.



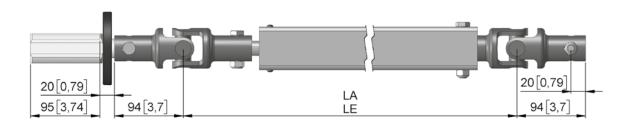



	Adapter 47					
Version	Type no.	HL [m]	LA [mm]	LE [mm]	Tube ø	m [ka]
GKT 06.0647	20943.0106.4721	0,60	640	550	50 x 1,5 mm	5,2
GKT 06.2347	20943.0123.4721	2,30	2070	1550	50 x 1,5 mm	8,8